



Valves Handbook



FORMATURA
INIEZIONE
POLIMERI

Valves Handbook

Valves Handbook is a new tool that resumes all FIP valve range.

All types and versions available in a glance as well as their specific accessories and main technical details such as Nominal Working Pressure and Kv factors.

This handbook is intended as practical quick reference. It does not substitute FIP catalogues which are the official reference for the products data.



FORMATURA
INIEZIONE
POLIMERI





INDEX

Legenda		page 4
Graphs Pressure / Temperature		page 5
VKD DN10÷50	2-way Ball Valve - Dual Block®	page 6
VKD DN65÷100	2-way Ball Valve - Dual Block®	page 7
TKD	3-way Ball Valve - Dual Block®	page 8
VEE DN10÷50	2-way Ball Valve Easyfit - Water	page 9
VEE DN65÷100	2-way Ball Valve Easyfit - Water	page 10
VXE DN10÷50	2-way Ball Valve Easyfit - Multipurpose	page 11
VXE DN65÷100	2-way Ball Valve Easyfit - Multipurpose	page 12
FK	Butterfly Valve – Multipurpose	page 13
FE	Butterfly Valve – Water	page 14
VM	Diaphragm Valve	page 15
CM	Compact Diaphragm Valve	page 16
VM/RM	Mini Diaphragm Valve	page 17
VZ	Foot Valve	page 18
VA	Air Release Valve	page 18
SXE	Ball Check Valve Easyfit	page 19
SR	Ball Check Valve	page 20
VR	Angle Seat Check Valve	page 21
RV	Sediment Strainer	page 22
VV	Angle Seat Valve	page 23
CR	Wafer Check Valve	page 24
SV	Angle Seat Pressure Relief Valve	page 25
VKD/CP	Pneumatically Actuated 2-way Ball Valve	page 26
TKD/CP	Pneumatically Actuated 3-way Ball Valve	page 27
FK/CP	Pneumatically Actuated Butterfly Valve	page 28
FE/CP	Pneumatically Actuated Butterfly Valve	page 29
MK/CP	Pneumatically Actuated Diaphragm Valve – Piston Actuator	page 30
VM/NC	Pneumatically Actuated Diaphragm Valve – Diaphragm Actuator – Normally Closed	page 31
VM/NO	Pneumatically Actuated Diaphragm Valve – Diaphragm Actuator – Normally Open	page 32
DM/NO	Pneumatically Actuated Diaphragm Valve – Direct Acting Actuator – Normally Open	page 33
CM/CP	Compact Pneumatically Actuated Diaphragm Valve – Piston Actuator	page 34
VKD/CE	Electrically Actuated 2-way Ball Valve	page 35
TKD/CE	Electrically Actuated 3-way Ball Valve	page 36
FK/CE	Electrically Actuated Butterfly Valve	page 37
FE/CE	Electrically Actuated Butterfly Valve	page 38
S12/S22	2-way Solenoid Valve	page 39
Reference Standards (Dimensions)		page 40

LEGENDA

d	Nominal outside diameter of the pipe in mm
DN	Nominal internal diameter in mm
PN	Nominal pressure (max working pressure at 20°C - water)
PVC-U	Unplasticized polyvinylchloride
PP-H	Homopolymer polypropylene MRS-10
PVC-C	Chlorinated polyvinylchloride
PVDF	Polyvinylidene fluoride MRS-25
ABS	Acrylonitrile Butadiene Styrene
PE	Polyethylene
EPDM	Ethylene propylene rubber
FPM	Vinylidene fluoride rubber
PTFE	Polytetrafluoroethylene
NBR	Butadiene-acrylonitrile rubber
CR	Chloroprene rubber
Kv100 [l/min]	Number of litres per minute of water, at a temperature of 20°C, that will flow through a valve with 1bar differential pressure, at a stated opening rate. The Kv100 values shown in the tables are calculated with the valve fully open.

Pressure / Temperature rating for water and harmless fluids to which the material is resistant.
In the other cases a reduction of the rated PN is required.

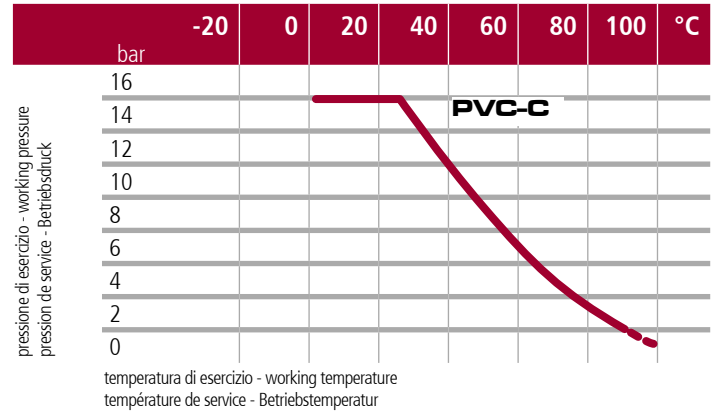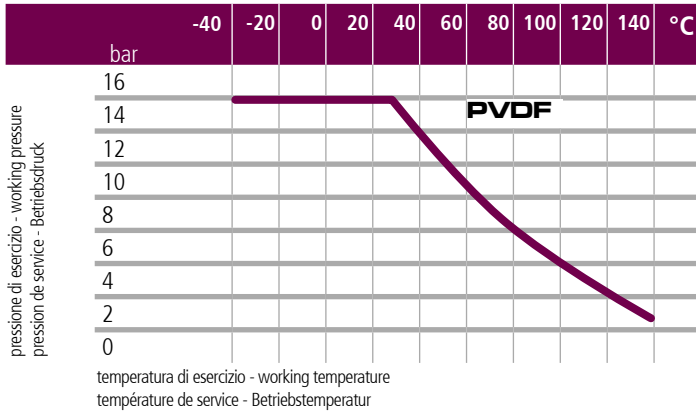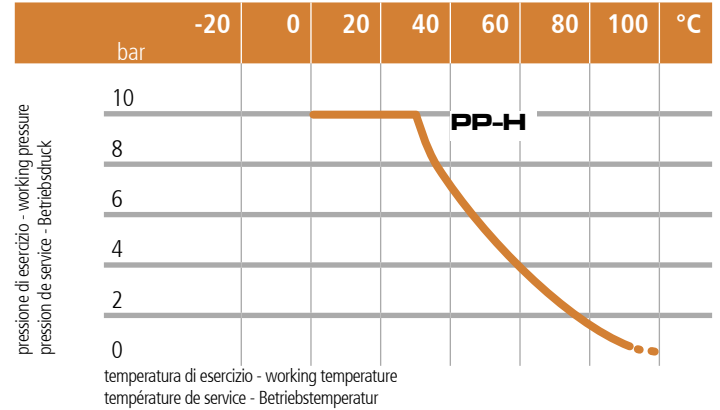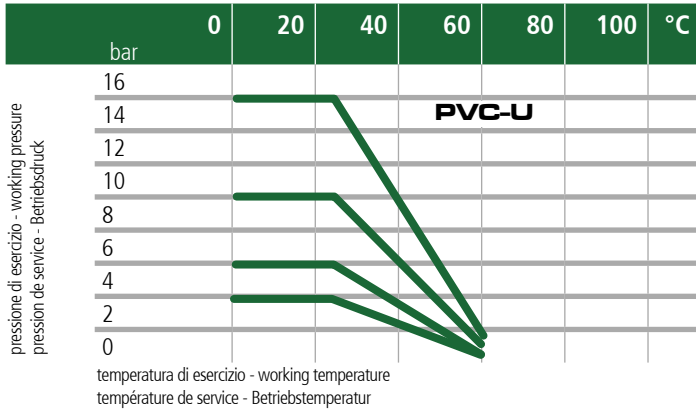



VKD DN10÷50 Dual Block



2-Way Ball Valve

Body materials

PVC-U
PP-H
PVDF
PVC-C

Ball seats material

PTFE

Seals materials

EPDM
FPM

Accessories

Dual Block System (supplied as standard)
Handle Block (SHKD)
Actuation module (Power Quick)
Mounting Plate (PMKD)
Stem Extension (PSKD)
Limit Switches box (MSKD)
End connections (Butt Weld.) in PE (CVDE)
End connections (Butt Weld.) in PP-H (CVDM)

d [mm]		16	20	25	32	40	50	63	
DN [mm]		10	15	20	25	32	40	50	
SIZE [inch]		3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	Type
ISO-DIN metric series plain female ends	PVC-U	●	●	●	●	●	●	●	VKDIV
	PP-H	●	●	●	●	●	●	●	VKDIM
	PVDF	●	●	●	●	●	●	●	VKDIF
	PVC-C	●	●	●	●	●	●	●	VKDIC
ISO-DIN metric series plain male ends	PVC-U	●	●	●	●	●	●	●	VKDDV
	PP-H	n.a.	●	●	●	●	●	●	VKDDM
	PVDF	n.a.	●	●	●	●	●	●	VKDDF
	PVC-C	n.a.	●	●	●	●	●	●	VKDDC
BSP series threaded female ends	PVC-U	●	●	●	●	●	●	●	VKDFV
	PP-H	●	●	●	●	●	●	●	VKDFM
	PVC-C	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	VKDFC
BS socket welding	PVC-U	●	●	●	●	●	●	●	VKDLV
ASTM series plain female ends	PVC-U	●	●	●	●	●	●	●	VKDAV
	PVC-C	●	●	●	●	●	●	●	VKDAC
NPT series threaded female ends	PVC-U	●	●	●	●	●	●	●	VKDNV
	PVC-C	●	●	●	●	●	●	●	VKDNC
JIS series plain female ends	PVC-U	n.a.	●	●	●	●	●	●	VKDJV
JIS series threaded female ends	PVC-U	n.a.	●	●	●	●	●	●	VKDGV
FLANGED ISO-DIN	PVC-U	n.a.	●	●	●	●	●	●	VKDOV
	PP-H	n.a.	●	●	●	●	●	●	VKDOM
	PVDF	n.a.	●	●	●	●	●	●	VKDOF
	PVC-C	n.a.	●	●	●	●	●	●	VKDOC
FLANGED ANSI	PVC-U	n.a.	●	●	●	●	●	●	VKDOAV
	PP-H	n.a.	●	●	●	●	●	●	VKDOAM
	PVDF	n.a.	●	●	●	●	●	●	VKDOAF
	PVC-C	n.a.	●	●	●	●	●	●	VKDOAC
FLANGED JIS	PVC-U	n.a.	●	●	●	●	●	●	VKDOJV
PN [bar] 16 bar = 232 psi 10 bar = 150 psi	PVC-U	16	16	16	16	16	16	16	
	PP-H	10	10	10	10	10	10	10	
	PVDF	16	16	16	16	16	16	16	
	PVC-C	16	16	16	16	16	16	16	
Kv100 [l/min]		80	200	385	770	1100	1750	3400	

Notes: n.a.= not available, o.r.= on request (not in standard production)



VKD DN65 ÷ 100 Dual Block



2-Way Ball Valve

Body materials

PVC-U
PP-H
PVDF
PVC-C

Ball seats material

PTFE

Seals materials

EPDM
FPM

Accessories

Dual Block System (supplied as standard)
Handle Block (SHKD)
Actuation module (Power Quick)
Mounting Plate (PMKD)
Stem Extension (PSKD)
Limit Switches box (MSKD)
End connections (Butt Weld.) in PE (CVDE)
End connections (Butt Weld.) in PP-H (CVDM)

d [mm]		75	90	110	
DN [mm]		65	80	100	
SIZE [inch]		2 1/2"	3"	4"	Type
ISO-DIN metric series plain female ends	PVC-U	●	●	●	VKDIV
	PP-H	●	●	●	VKDIM
	PVDF	●	●	●	VKDIF
	PVC-C	●	●	●	VKDIC
ISO-DIN metric series plain male ends	PVC-U	●	●	●	VKDDV
	PP-H	●	●	●	VKDDM
	P VDF	●	●	●	VKDDF
	PVC-C	●	●	●	VKDDC
BSP series threaded female ends	PVC-U	●	●	●	VKDFV
	PP-H	n.a.	n.a.	n.a.	VKDFM
	PVC-C	n.a.	n.a.	n.a.	VKDFC
BS socket welding	PVC-U	●	●	●	VKDLV
ASTM series plain female ends	PVC-U	●	●	●	VKDAV
	PVC-C	●	●	●	VKDAC
NPT series threaded female ends	PVC-U	●	●	●	VKDNV
	PVC-C	●	●	●	VKDNC
JIS series plain female ends	PVC-U	●	●	●	VKDJV
JIS series threaded female ends	PVC-U	●	●	●	VKDGV
FLANGED ISO-DIN	PVC-U	●	●	●	VKDOV
	PP-H	●	●	●	VKDOM
	PVDF	●	●	●	VKDOF
FLANGED ANSI	PVC-U	●	●	●	VKDOAV
	PP-H	●	●	●	VKDOAM
	PVDF	●	●	●	VKDOAF
FLANGED JIS	PVC-U	●	●	●	VKDOJV
	PVC-C	●	●	●	
PN [bar] 16 bar = 232 psi 10 bar = 150 psi	PP-H	10	10	10	
	PVDF	16	16	16	
	PVC-C	16	16	16	
Kv100 [l/min]		5250	7100	9500	

Notes: n.a.= not available, o.r.= on request (not in standard production)



TKD Dual Block



3-Way Ball Valve

Body materials

PVC-U
PP-H
PVC-C

Ball seats material

PTFE

Seals materials

EPDM
FPM

Functions

T - bore
L - bore

Accessories

Dual Block System (supplied as standard)
Handle Block (SHKD)
Actuation module (Power Quick)
Mounting Plate (PMKD)
Stem Extension (PSKD)
Limit Switches box (MSKD)
End connections (Butt Weld.) in PE (CVDE)
End connections (Butt Weld.) in PP-H (CVDM)
Handle stop 90° or 180° (HSTKD090 or HSTKD180)

d [mm]		16	20	25	32	40	50	63	
DN [mm]		10	15	20	25	32	40	50	
SIZE [inch]		3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	Type
ISO-DIN metric series plain female ends	PVC-U	●	●	●	●	●	●	●	TKDIV
	PP-H	●	●	●	●	●	●	●	TKDIM
	PVDF	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	TKDIF
	PVC-C	●	●	●	●	●	●	●	TKDIC
ISO-DIN metric series plain male ends	PVC-U	●	●	●	●	●	●	●	TKDDV
	PP-H	n.a.	●	●	●	●	●	●	TKDDM
	PVDF	n.a.	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	TKDDF
	PVC-C	n.a.	●	●	●	●	●	●	TKDDC
BSP series threaded female ends	PVC-U	●	●	●	●	●	●	●	TKDFV
	PP-H	●	●	●	●	●	●	●	TKDFM
BS socket welding	PVC-U	●	●	●	●	●	●	●	TKDLV
ASTM series plain female ends	PVC-U	●	●	●	●	●	●	●	TKDAV
	PVC-C	●	●	●	●	●	●	●	TKDAC
NPT series threaded female ends	PVC-U	●	●	●	●	●	●	●	TKDNV
	PVC-C	●	●	●	●	●	●	●	TKDNC
JIS series plain female ends	PVC-U	n.a.	●	●	●	●	●	●	TKDJV
JIS series threaded female ends	PVC-U	n.a.	●	●	●	●	●	●	TKDGV
FLANGED ISO-DIN	PVC-U	n.a.	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	TKDOV
	PP-H	n.a.	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	TKDOM
	PVDF	n.a.	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	TKDOF
	PVC-C	n.a.	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	TKDOC
FLANGED ANSI	PVC-U	n.a.	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	TKDOAV
	PP-H	n.a.	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	TKDOAM
	PVDF	n.a.	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	TKDOAF
	PVC-C	n.a.	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	TKDOAC
FLANGED JIS	PVC-U	n.a.	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	TKDOJV
PN [bar] 16 bar = 232 psi 10 bar = 150 psi	PVC-U	16	16	16	16	16	16	16	
	PP-H	10	10	10	10	10	10	10	
	PVDF	16	16	16	16	16	16	16	
	PVC-C	16	16	16	16	16	16	16	

Notes: n.a.= not available, o.r.= on request (not in standard production)



VEE DN10÷50 Easyfit



2-Way Ball Valve

Body material

PVC-U

Ball seats material

PE

Seals material

EPDM

Accessories

End connections (Butt Weld.) in PE (CVDE)

Hose adaptor (CVPV)

Threaded male ends (CVRV)

VEE Easyfit

d [mm]		16	20	25	32	40	50	63	
DN [mm]		10	15	20	25	32	40	50	
SIZE [inch]		3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	Type
ISO-DIN metric series plain female ends	PVC-U	●	●	●	●	●	●	●	VEEIV
BSP series threaded female ends	PVC-U	●	●	●	●	●	●	●	VEEFV
BS socket welding	PVC-U	n.a.	●	●	●	●	●	●	VEELV
ASTM series plain female ends	PVC-U	n.a.	●	●	●	●	●	●	VEEAV
NPT series threaded female ends	PVC-U	n.a.	●	●	●	●	●	●	VEENV
JIS series plain female ends	PVC-U	n.a.	●	●	●	●	●	●	VEEJV
JIS series threaded female ends	PVC-U	n.a.	●	●	●	●	●	●	VEEGV
PN [bar] 16 bar = 232 psi	PVC-U	16	16	16	16	16	16	16	
Kv100 [l/min]		80	200	385	770	1100	1750	3400	

Notes: n.a.= not available

Multifunctional handle and Easytorque Kit



Nuts tightening

Easytorque kit is the innovative tool designed by FIP for optimal tightening and adjustment of all threaded components of the Easyfit valves (carriers and nuts) applying a defined and repeatable torque. The use of the Easytorque wrench is recommended to minimize mechanical stresses on thermoplastic threads, preventing fluid leakage, optimizing ball valve operation and minimizing the wear out of the elastomeric seals. The use of the Easyfit torque wrench as well as the multifunctional handle also avoids non specific tools causing union nut accidental damaging.



Ball Seat Carrier adjustment

Easyfit Labelling System

Easyfit Labelling System helps you to customize valves with company brands, serial or identifying numbers or service information such as the function of the valve inside the plant, the conveyed fluid, but also specific information for after selling customer service, such as the customer's name, or date and place of the installation.

More details on www.fipnet.it/Support/Labeling System





VEE

DN65 ÷ 100

Easyfit



2-Way Ball Valve

Body material

PVC-U

Ball seats material

PE

Seals material

EPDM

Accessories

End connections (Butt Weld.) in PE (CVDE)

d [mm]		75	90	110	
DN [mm]		65	80	100	
SIZE [inch]		2 1/2"	3"	4"	Type
ISO-DIN metric series plain female ends	PVC-U	●	●	●	VEEIV
BSP series threaded female ends	PVC-U	●	●	●	VEEFV
BS socket welding	PVC-U	●	●	●	VEELV
ASTM series plain female ends	PVC-U	●	●	●	VEEAV
NPT series threaded female ends	PVC-U	●	●	●	VEENV
JIS series plain female ends	PVC-U	●	●	●	VEEJV
JIS series threaded female ends	PVC-U	●	●	●	VEEGV
PN [bar] 16 bar = 232 psi	PVC-U	16	16	16	
Kv100 [l/min]		5000	7000	9400	

Easyfit Quick-release multifunctional handle



The innovative Easyfit handle is composed by a central hub fixedly coupled to the valve stem and by a double spoke grip that can be released from the hub with a simple operation. The handle can also be used as a tool for disassembly, assembly or adjustment of the support of the ball seat carrier.

For this function, once removed the handle from the hub, enter the two upper protrusions into the appropriate slots of the seat carrier to screw or unscrew it.



Ball Seat Carrier adjustment

Easyfit Labelling System

Easyfit Labelling System helps you to customize valves with company brands, serial or identifying numbers or service information such as the function of the valve inside the plant, the conveyed fluid, but also specific information for after selling customer service, such as the customer's name, or date and place of the installation.

More details on [www.fipnet.it/Support/Labelling System](http://www.fipnet.it/Support/LabellingSystem)



VEE Easyfit



VXE

DN10÷50

Easyfit



2-Way Ball Valve

Body materials

PVC-U
PVC-C

Ball seats material

PTFE

Seals materials

EPDM
FPM

Accessories

End connections (Butt Weld.) in PE (CVDE)
Hose adaptor (CVPV)
Threaded male ends (CVRV)

VXE Easyfit

d [mm]		16	20	25	32	40	50	63	
DN [mm]		10	15	20	25	32	40	50	
SIZE [inch]		3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	Type
ISO-DIN metric series plain female ends	PVC-U	●	●	●	●	●	●	●	VXEIV
	PVC-C	●	●	●	●	●	●	●	VXEIC
BSP series threaded female ends	PVC-U	●	●	●	●	●	●	●	VXEFV
BS socket welding	PVC-U	n.a.	●	●	●	●	●	●	VXELV
ASTM series plain female ends	PVC-U	n.a.	●	●	●	●	●	●	VXEAV
	PVC-C	n.a.	●	●	●	●	●	●	VXEAC
NPT series threaded female ends	PVC-U	n.a.	●	●	●	●	●	●	VXENV
	PVC-C	n.a.	●	●	●	●	●	●	VXENC
JIS series plain female ends	PVC-U	n.a.	●	●	●	●	●	●	VXEJV
JIS series threaded female ends	PVC-U	n.a.	●	●	●	●	●	●	VXEGV
PN [bar]	PVC-U	16	16	16	16	16	16	16	
16 bar = 232 psi	PVC-C	16	16	16	16	16	16	16	
Kv100 [l/min]		80	200	385	770	1100	1750	3400	

Notes: n.a. = not available

Multifunctional handle and Easytorque Kit



Nuts tightening

Easytorque kit is the innovative tool designed by FIP for optimal tightening and adjustment of all threaded components of the Easyfit valves (carriers and nuts) applying a defined and repeatable torque. The use of the Easytorque wrench is recommended to minimize mechanical stresses on thermoplastic threads, preventing fluid leakage, optimizing ball valve operation and minimizing the wear out of the elastomeric seals. The use of the Easyfit torque wrench as well as the multifunctional handle also avoids non specific tools causing union nut accidental damaging.



Ball Seat Carrier adjustment

Easyfit Labelling System

Easyfit Labelling System helps you to customize valves with company brands, serial or identifying numbers or service information such as the function of the valve inside the plant, the conveyed fluid, but also specific information for after selling customer service, such as the customer's name, or date and place of the installation. More details on www.fipnet.it/Support/LabellingSystem





VXE DN65 ÷ 100 Easyfit



2-Way Ball Valve

Body materials

PVC-U
PVC-C

Ball seats material

PTFE

Seals materials

EPDM
FPM

Accessories

End connections (Butt Weld.) in PE (CVDE)
Hose adaptor (CVPV)
Threaded male ends (CVRV)

d [mm]		75	90	110	
DN [mm]		65	80	100	
SIZE [inch]		2 1/2"	3"	4"	Type
ISO-DIN metric series plain female ends	PVC-U	●	●	●	VXEIV
	PVC-C	●	●	●	VXEIC
BSP series threaded female ends	PVC-U	●	●	●	VXEIV
BS socket welding	PVC-U	●	●	●	VXELV
ASTM series plain female ends	PVC-U	●	●	●	VXEAV
	PVC-C	●	●	●	VXEAC
NPT series threaded female ends	PVC-U	●	●	●	VXENV
	PVC-C	●	●	●	VXENC
JIS series plain female ends	PVC-U	●	●	●	VXEJV
JIS series threaded female ends	PVC-U	●	●	●	VXGEV
PN [bar] 16 bar = 232 psi	PVC-U	16	16	16	
	PVC-C	16	16	16	
Kv100 [l/min]		5000	7000	9400	

Easyfit Quick-release multifunctional handle



Thanks to the innovative Easyfit System, the handle can be easily released from the hub to carry out the union nuts rotation during valve installation and the ball seat carrier adjustment. The handle can be turned into a wrench key for tightening or loosening the union nuts simply removing, flipping and engaging the insert housed inside it in the appropriate seat. The tool so composed is extremely rugged and light at the same time offering an excellent ergonomic grip. The insert design engages perfectly on the external profile of the union nuts with a secure grip allowing to exercise a high torque without damaging the nuts in any way. The handle can also be used as a tool for disassembly, assembly or adjustment of the support of the ball seat carrier. For this function, once removed the handle from the hub enter the two upper protrusions into the appropriate slots of the seat carrier to screw or unscrew it.



Nuts tightening



Ball Seat Carrier adjustment

Easyfit Labelling System

Easyfit Labelling System helps you to customize valves with company brands, serial or identifying numbers or service information such as the function of the valve inside the plant, the conveyed fluid, but also specific information for after selling customer service, such as the customer's name, or date and place of the installation. More details on www.fipnet.it/Support/LabellingSystem



FK



Butterfly Valve

Body material

PP-GR

Disc materials

PVC-U

PP-H

PVDF

PVC-C

ABS

Stem material

Stainless steel 420
(S.S 316 on req.)

Seals materials

EPDM

FPM

(NBR on req.)

Accessories


Infinite adjusting kit (FK/RF)

Microswitches box (FK/MS)

d [mm]		50	63	75	90	110	140	160	225	280	315	
DN [mm]		40	50	65	80	100	125	150	200	250	300	
SIZE [inch]		1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"	Type
Flangeable according: ISO-DIN-UNI BS 10 table D/E ASA B16,5 class 150 JIS 2212	PVC-U	●	●	●	●	●	●	●	●	●	●	FKOV/..
	PP-H	●	●	●	●	●	●	●	●	●	●	FKOM/..
	PVDF	●	●	●	●	●	●	●	●	●	●	FKOF/..
	PVC-C	●	●	●	●	●	●	●	●	●	●	FKOC/..
	ABS	●	●	●	●	●	●	●	●	●	●	FKOA/..
LUG version DIN	PVC-U	n.a	n.a	●	●	●	●	●	●	n.a	n.a	FKOLV/...
	PP-H	n.a	n.a	●	●	●	●	●	●	n.a	n.a	FKOLM/...
	PVDF	n.a	n.a	●	●	●	●	●	●	n.a	n.a	FKOLF/...
	PVC-C	n.a	n.a	●	●	●	●	●	●	n.a	n.a	FKOLC/...
	ABS	n.a	n.a	●	●	●	●	●	●	n.a	n.a	FKOLA/...
LUG version ANSI	PVC-U	n.a	n.a	●	●	●	●	●	●	o.r.	o.r.	FKOALV/...
	PP-H	n.a	n.a	●	●	●	●	●	●	o.r.	o.r.	FKOALM/...
	PVDF	n.a	n.a	●	●	●	●	●	●	o.r.	o.r.	FKOALF/...
	PVC-C	n.a	n.a	●	●	●	●	●	●	o.r.	o.r.	FKOALC/...
	ABS	n.a	n.a	●	●	●	●	●	●	o.r.	o.r.	FKOALA/...
PN [bar]	PVC-U	16	16	10	10	10	10	10	10	10	8	
	PP-H	10	10	10	10	10	10	10	10	10	8	
	PVDF	16	16	10	10	10	10	10	10	10	8	
	PVC-C	16	16	10	10	10	10	10	10	10	8	
	ABS	16	16	10	10	10	10	10	10	10	8	
PN [bar] lug version	all mater.	-	-	10	10	10	10	10	10	6	6	
Kv100 [l/min]		1000	1285	1700	3550	5900	9850	18700	30500	53200	81600	

Notes: n.a.= not available, o.r.= on request (not in standard production)

Versions		
With handle	FKO.../LM	DN 40 - DN 200
Free shaft with actuation flange	FKO.../FM	DN 40 - DN 300
With gear box	FKO.../RM	DN 65 - DN 300

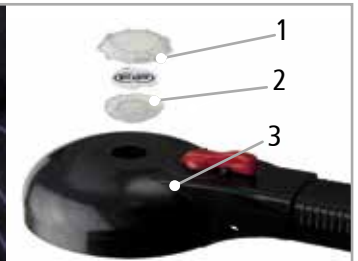



Butterfly Valve

Body material

PVC-U

Disc material

PVC-U

Stem material

Zinc plated steel

Seals materials

EPDM
FPM
(NBR on req.)

Accessories

LUG DIN inserts kit

d [mm]		50	63	75	90	110	140	160	225	
DN [mm]		40	50	65	80	100	125	150	200	
SIZE [inch]		1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"	Type
Flangeable according: ISO-DIN-UNI BS 10 table D/E ASA B16,5 class 150 JIS 2212	PVC-U	●	●	●	●	●	●	●	●	FEOV/..
LUG version DIN (with movable inserts kit)	PVC-U	●	●	●	●	●	●	●	●	
PN [bar] 16 bar = 232 psi 10 bar = 150 psi 6 bar = 87 psi 4 bar = 58 psi	PVC-U	16	16	10	10	10	10	10	10	
PN [bar] lug version		6	6	6	6	6	6	4	4	
Kv100 [l/min]		1000	1285	1700	3550	5900	9850	18700	30500	

Notes: n.a.= not available, o.r.= on request (not in standard production)

Versions

With handle	FEOV/LM	DN 40 - DN 200
With gear box	FEOV/RM	DN 65 - DN 300



VM



Diaphragm Valve

Body materials

PVC-U
PP-H
PVDF
PVC-C

Diaphragm materials

EPDM
FPM
PTFE
(NBR on req.)

O-Ring materials

EPDM
FPM

Accessories

Position indicator as standard
Security blocking device
Electrical position indicator (1 microswitch)
Plate for DN15-50 bodies alignment
End connections (Butt Weld.) in PE (DN15-50)
End connections (Butt Weld.) in PP-H (DN15-50)

d [mm]		20	25	32	40	50	63	75	90	110	
DN [mm]		15	20	25	32	40	50	65	80	100	
SIZE [inch]		1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	Type
ISO-DIN metric series unionsed plain female ends	PVC-U	●	●	●	●	●	●	n.a.	n.a.	n.a.	VMUIV
	PP-H	●	●	●	●	●	●	n.a.	n.a.	n.a.	VMUIM
	PVDF	●	●	●	●	●	●	n.a.	n.a.	n.a.	VMUIF
	PVC-C	●	●	●	●	●	●	n.a.	n.a.	n.a.	VMUIC
ISO-DIN metric series plain male ends	PVC-U	●	●	●	●	●	●	●	●	●	VMDV
	PP-H	●	●	●	●	●	●	●	●	●	VMDM
	PVDF	●	●	●	●	●	●	●	●	●	VMDF
	PVC-C	●	●	●	●	●	●	●	●	●	VMDC
BSP series unionsed threaded female ends	PVC-U	●	●	●	●	●	●	n.a.	n.a.	n.a.	VMUFV
	PVC-C	●	●	●	●	●	●	n.a.	n.a.	n.a.	VMUFC
BS unionsed socket welding	PVC-U	●	●	●	●	●	●	n.a.	n.a.	n.a.	VMULV
ASTM series unionsed plain female ends	PVC-U	●	●	●	●	●	●	n.a.	n.a.	n.a.	VMUAV
	PVC-C	●	●	●	●	●	●	n.a.	n.a.	n.a.	VMUAC
ASTM series plain male ends	PVC-U	●	●	●	●	●	●	●	●	●	VMYV
	PVC-C	●	●	●	●	●	●	●	●	●	VMYC
NPT series unionsed threaded female ends	PVC-U	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	n.a.	n.a.	n.a.	VMUNV
	PVC-C	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	n.a.	n.a.	n.a.	VMUNC
JIS series unionsed plain female ends	PVC-U	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	n.a.	n.a.	n.a.	VMUJV
FLANGED ISO-DIN	PVC-U	●	●	●	●	●	●	●	●	●	VMOV
	PP-H	●	●	●	●	●	●	●	●	●	VMOIM
	PVDF	●	●	●	●	●	●	●	●	●	VMOF
	PVC-C	●	●	●	●	●	●	●	●	●	VMOIC
FLANGED ANSI	PVC-U	●	●	●	●	●	●	●	●	●	VMOAV
	PP-H	●	●	●	●	●	●	●	●	●	VMOAM
	PVDF	●	●	●	●	●	●	●	●	●	VMOAF
	PVC-C	●	●	●	●	●	●	●	●	●	VMOAC
FLANGED JIS	PVC-U	●	●	●	●	●	●	●	●	●	VMOJV
PN [bar] 10 bar = 150 psi	PVC-U	10	10	10	10	10	10	10	10	10	
	PP-H	10	10	10	10	10	10	10	10	10	
	PVDF	10	10	10	10	10	10	10	10	10	
	PVC-C	10	10	10	10	10	10	10	10	10	
Kv100 [l/min]		93	136	175	300	416	766	1300	2000	2700	

Notes: n.a.= not available, o.r.= on request (not in standard production)



Compact Diaphragm Valve

Body materials

PVC-U
PP-H
PVDF
PVC-C

Diaphragm materials

EPDM
FPM
PTFE

O-Ring materials

EPDM
FPM

Accessories

Position indicator as standard
Adjustable travel stop as standard
End connections (Butt Weld.) in PE (DN15)
End connections (Butt Weld.) in PP-H (DN15)

d [mm]		16	20	
DN [mm]		12	15	
SIZE [inch]		3/8"	1/2"	Type
ISO-DIN metric series unionised plain female ends	PVC-U	n.a.	●	CMUIV
	PP-H	n.a.	●	CMUIM
	PVDF	n.a.	●	CMUIF
	PVC-C	n.a.	●	CMUIC
ISO-DIN metric series plain female ends	PVC-U	●	●	CMIV
	PP-H	●	●	CMIM
	PVDF	●	●	CMIF
ISO-DIN metric series plain male ends	PVC-U	n.a.	●	CMDV
	PP-H	n.a.	●	CMDM
	PVDF	n.a.	●	CMDF
	PVC-C	n.a.	●	CMDC
BSP series unionised threaded female ends	PVC-U	n.a.	●	CMUFV
BSP series threaded female ends	PVC-U	●	●	CMFV
	PP-H	●	●	CMFM
	PVDF	●	●	CMFF
BS unionised socket welding	PVC-U	n.a.	o.r.	CMULV
ASTM series unionised plain female ends	PVC-U	n.a.	o.r.	CMUAV
	PVC-C	n.a.	o.r.	CMUAC
NPT series unionised threaded female ends	PVC-U	n.a.	o.r.	CMUNV
	PVC-C	n.a.	o.r.	CMUNC
PN [bar] 6 bar = 87 psi	PVC-U	6	6	
	PP-H	6	6	
	PVDF	6	6	
	PVC-C	6	6	
Kv100 [l/min]		47	60	

Notes: n.a.= not available, o.r.= on request (not in standard production)

VM/RM



d [mm]		12	
DN [mm]		8	
R [BSP inches]		1/4"	Type
ISO-DIN metric series plain female ends	PVC-U	●	VMIV
BSP series threaded female ends	PVC-U	●	VMFV
PN [bar]	PVC-U	10	



d [mm]		20	
DN [mm]		15	
R [BSP inches]		1/2"	Type
BSP series one male thread one hose adaptor	PVC-U	●	RMRPV
BSP series two male threads	PVC-U	●	RMRV
PN [bar]	PVC-U	4	

Notes: n.a.= not available, o.r.= on request (not in standard production)

Mini Diaphragm Valve

Body material

PVC-U

Diaphragm material

EPDM



Foot Valve

Body material

PVC-U

Seals material

EPDM

Accessories

PVC-U screen (SZIV)



Air Release Valve

Body material

PVC-U

Seals material

EPDM

d [mm]		16	20	25	32	40	50	63	
DN [mm]		10	15	20	25	32	40	50	
R [BSP inches]		3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	Type
ISO-DIN metric series plain male and female ends	PVC-U	●	●	●	●	●	●	●	VZIV
BSP series threaded female ends	PVC-U	n.a.	●	●	●	●	●	●	VZFV
PN [bar] 16 bar = 232 psi	PVC-U	16	16	16	16	16	16	16	
Minimum pressure drop [bar] for piston in the fully open position		0.008	0.008	0.009	0.014	0.017	0.018	0.021	
Minimum back pressure [mm H ₂ O] for drop tight service (piston in closed position)		150	150	200	350	350	350	350	

d [mm]		20	25	32	40	50	63	
DN [mm]		15	20	25	32	40	50	
R [BSP inches]		1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	Type
ISO-DIN metric series plain male and female ends	PVC-U	●	●	●	●	●	●	VAIV
BSP series threaded female ends	PVC-U	●	●	●	●	●	●	VAFV
PN [bar] 16 bar = 232 psi	PVC-U	16	16	16	16	16	16	

Notes: n.a.= not available, o.r.= on request (not in standard production)





SXE Easyfit



Ball Check Valve

Body materials

PVC-U
PVC-C

Seals materials

EPDM
FPM

d [mm]		16	20	25	32	40	50	63	
DN [mm]		10	15	20	25	32	40	50	
SIZE [inch]		3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	Type
ISO-DIN metric series plain female ends	PVC-U	●	●	●	●	●	●	●	SXEIV
	PVC-C	●	●	●	●	●	●	●	SXEIC
BSP series threaded female ends	PVC-U	●	●	●	●	●	●	●	SXEIV
BS socket welding	PVC-U	n.a.	●	●	●	●	●	●	SXELV
ASTM series plain female ends	PVC-U	n.a.	●	●	●	●	●	●	SXEAV
	PVC-C	n.a.	●	●	●	●	●	●	SXEAC
NPT series threaded female ends	PVC-U	n.a.	●	●	●	●	●	●	SXENV
	PVC-C	n.a.	●	●	●	●	●	●	SXENC
JIS series plain female ends	PVC-U	n.a.	●	●	●	●	●	●	SXEJV
JIS series threaded female ends	PVC-U	n.a.	●	●	●	●	●	●	SXEGV
PN [bar]	PVC-U	16	16	16	16	16	16	16	
16 bar = 232 psi	PVC-C	16	16	16	16	16	16	16	
Kv100 [l/min]		172	152	258	433	643	928	1343	
Minimum back pressure [bar] for drop tight service (valve in horizontal position)	PVC-U	0,2	0,2	0,2	0,2	0,2	0,2	0,2	
	PVC-C	0,2	0,2	0,2	0,2	0,2	0,2	0,2	

Notes: n.a.= not available

Multifunctional handle and Easytorque Kit



Nuts tightening

Easytorque kit is the innovative tool designed by FIP for optimal tightening and adjustment of all threaded components of the Easyfit valves (carriers and nuts) applying a defined and repeatable torque. The use of the Easytorque wrench is recommended to minimize mechanical stresses on thermoplastic threads, preventing fluid leakage, optimizing ball valve operation and minimizing the wear out of the elastomeric seals. The use of the Easyfit torque wrench as well as the multifunctional handle also avoids non specific tools causing union nut accidental damaging.



Ball Seat Carrier adjustment

Easyfit Labelling System

Easyfit Labelling System helps you to customize valves with company brands, serial or identifying numbers or service information such as the function of the valve inside the plant, the conveyed fluid, but also specific information for after selling customer service, such as the customer's name, or date and place of the installation.

More details on www.fipnet.it/Support/Labelling System




SR



d [mm]		20	25	32	40	50	63	
DN [mm]		15	20	25	32	40	50	
								Type
ISO-DIN metric series plain male and female ends	PP-H	●	●	●	●	●	●	SRIM
	PVDF	●	●	●	●	●	●	SRIF
FLANGED ISO-DIN	PP-H	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	SROM
	PVDF	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	SROF
FLANGED ANSI	PP-H	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	SROAM
	PVDF	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	SROAF
PN [bar] 16 bar = 232 psi 10 bar = 150 psi	PP-H	10	10	10	10	10	10	
	PVDF	16	16	16	16	16	16	
Kv100 [l/min]		152	258	433	643	928	1343	
Minimum back pressure [bar] for drop tight service (valve in horizontal position)	PP-H	0,4	0,4	0,4	0,4	0,4	0,4	
	PVDF	0,2	0,2	0,2	0,2	0,2	0,2	

Notes: n.a.= not available, o.r.= on request (not in standard production)

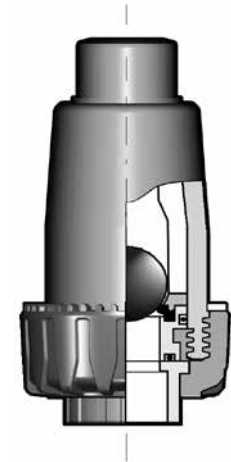

Ball Check Valve

Body materials

PP-H
PVDF

Seals materials

EPDM
FPM

VR



Angle Seat Check Valve

Body materials

PVC-U
PP-H

Seals materials

EPDM
FPM

d [mm]		16	20	25	32	40	50	63	75	90	110	
DN [mm]		10	15	20	25	32	40	50	65	80	100	
R [BSP inches]		3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	Type
ISO-DIN metric series unionised plain female ends	PVC-U	●	●	●	●	●	●	●	n.a.	n.a.	n.a.	VRUIV
	PP-H	●	●	●	●	●	●	●	n.a.	n.a.	n.a.	VRUIM
ISO-DIN metric series plain female ends	PVC-U	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	●	●	●	VRIV
	PP-H	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	●	●	n.a.	VRIM
ISO-DIN metric series plain male ends	PVC-U	●	●	●	●	●	●	●	n.a.	n.a.	n.a.	VRDV
	PVC-U	●	●	●	●	●	●	●	n.a.	n.a.	n.a.	VRUFV
BSP series unionised threaded female ends	PVC-U	●	●	●	●	●	●	●	n.a.	n.a.	n.a.	VRUFV
BSP series threaded female ends	PVC-U	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	●	●	●	VRFV
BS unionised socket welding	PVC-U	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	n.a.	n.a.	n.a.	VRULV
ASTM series unionised plain female ends	PVC-U	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	n.a.	n.a.	n.a.	VRUAV
NPT series unionised threaded female ends	PVC-U	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	n.a.	n.a.	n.a.	VRUNV
FLANGED ISO-DIN	PVC-U	n.a.	●	●	●	●	●	●	●	●	●	VR0V
FLANGED ANSI	PVC-U	n.a.	●	●	●	●	●	●	●	●	●	VR0AV
PN [bar] 16 bar = 232 psi 10 bar = 150 psi 6 bar = 87 psi 4 bar = 58 psi	PVC-U	16	16	16	16	16	16	16	10	6	6	
	PP-H	10	10	10	10	10	10	10	6	4		
Kv100 [l/min]		47	110	205	375	560	835	1300	1950	2600	3500	
Min pressure to raise the piston [bar]		0,008	0,008	0,009	0,014	0,017	0,018	0,021	0,022	0,022	0,024	
Minimum back pressure [mmH2O] for drop tight service (valve in horizontal or vertical position)		150	150	200	350	350	350	350	350	350	350	

Notes: n.a.= not available, o.r.= on request (not in standard production)

RV



Sediment Strainer

Body materials

PVC-U
PVC-U transparent
PP-H
PVC-C

Seals materials

EPDM
FPM

screen material	PP	PVC	PVC	PVC	PVC	INOX
hole pitch [mm]	1,5	1,0	1,5	2,0	2,5	0,7
holes per cm ²	100	190	100	60	35	240
equivalent ASTM mesh size	30	50	35	30	18	35
equivalent hole diameter µm	600	300	500	600	900	500

d [mm]		16	20	25	32	40	50	63	75	90	110	
DN [mm]		10	15	20	25	32	40	50	65	80	100	
Size [inches]		3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	Type
ISO-DIN metric series unionised plain female ends	PVC-U	●	●	●	●	●	●	●	n.a.	n.a.	n.a.	RVUIV
	PVC-U tr.	●	●	●	●	●	●	●	n.a.	n.a.	n.a.	RVUIT
	PP-H	●	●	●	●	●	●	●	n.a.	n.a.	n.a.	RVUIM
	PVC-C	●	●	●	●	●	●	●	n.a.	n.a.	n.a.	RVUIC
ISO-DIN metric series plain female ends	PVC-U	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	●	●	●	RVIV
	PVC-U tr.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	●	●	●	RVIT
	PP-H	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	●	●	●	RVIM
ISO-DIN metric series plain male ends	PVC-U	●	●	●	●	●	●	●	n.a.	n.a.	n.a.	RVDV
	PVC-U tr.	●	●	●	●	●	●	●	n.a.	n.a.	n.a.	RVDT
BSP series unionised threaded female ends	PVC-U	●	●	●	●	●	●	●	n.a.	n.a.	n.a.	RVUFV
	PVC-U tr.	●	●	●	●	●	●	●	n.a.	n.a.	n.a.	RVUFT
BSP series threaded female ends	PVC-U	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	●	●	●	RVFV
	PVC-U tr.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	●	●	●	RVFT
BS unionised socket welding	PVC-U	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	n.a.	n.a.	n.a.	RVULV
ASTM series unionised plain female ends	PVC-U tr.	●	●	●	●	●	●	●	n.a.	n.a.	n.a.	RVUAT
	PVC-C	●	●	●	●	●	●	●	n.a.	n.a.	n.a.	RVUAC
ASTM series plain female ends	PVC-U tr.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	●	●	RVAT
NPT series unionised threaded female ends	PVC-U tr.	●	●	●	●	●	●	●	n.a.	n.a.	n.a.	RVUNT
	C- PVC	●	●	●	●	●	●	●	n.a.	n.a.	n.a.	RVUNC
NPT series threaded female ends	PVC-U tr.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	●	●	RVNT
FLANGED ISO-DIN	PVC-U	n.a.	●	●	●	●	●	●	●	●	●	RVOV
	PVC-U tr.	n.a.	●	●	●	●	●	●	●	●	●	RVOT
FLANGED ANSI	PVC-U	n.a.	●	●	●	●	●	●	●	●	●	RVOAV
	PVC-U tr.	n.a.	●	●	●	●	●	●	●	●	●	RVOAT
PN [bar] 16 bar = 232 psi 10 bar = 150 psi 6 bar = 87 psi 4 bar = 58 psi	PVC-U	16	16	16	16	16	16	16	10	6	6	
	PVC-U tr.	16	16	16	16	10	10	10	6	4	4	
	PP-H	n.a.	10	10	10	10	10	10	6	4	4	
	PVC-C	n.a.	16	16	16	16	16	16	n.a.	n.a.	n.a.	
Kv100 [l/min]		22	40	70	103	188	255	410	650	1050	1700	
Total filtering surface At [cm ²]		16	16	23,5	36	53	69	101	197	247	396	

Notes: n.a.= not available, o.r.= on request (not in standard production)



Angle Seat Valve

Body material

PVC-U

Seals materials

EPDM/PE
EPDM/PTFE (*)
FPM/PTFE (*)

(*) *spare set*

d [mm]		16	20	25	32	40	50	63	
DN [mm]		10	15	20	25	32	40	50	
Size [inches]		3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	Type
ISO-DIN metric series unionised plain female ends	PVC-U	●	●	●	●	●	●	●	VVUIV
ISO-DIN metric series plain male ends	PVC-U	●	●	●	●	●	●	●	VVDV
BSP series unionised threaded female ends	PVC-U	●	●	●	●	●	●	●	VVUFV
BS unionised socket welding	PVC-U	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	VVULV
ASTM series unionised plain female ends	PVC-U	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	VVUAV
NPT series unionised threaded female ends	PVC-U	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	VVUNV
FLANGED ISO-DIN	PVC-U	n.a.	●	●	●	●	●	●	VVOV
FLANGED ANSI	PVC-U	n.a.	●	●	●	●	●	●	VVOAV
PN [bar] 16 bar = 232 psi 10 bar = 150 psi	PVC-U	16	16	16	16	10	10	10	
Kv100 [l/min]		47	110	205	375	560	835	1300	

CR

d [mm]		50	63	75	90	110	140	160	225	280	315	
DN [mm]		40	50	65	80	100	125	150	200	250	300	Type
ISO-DIN	PVC-U	●	●	●	●	●	●	●	●	●	●	CROV
Working Pressure [bar]	PVC-U	5	5	5	5	5	5	5	5	5	5	
Minimum pressure [bar] for opening with upward flow	PVC-U	0,002	0,003	0,003	0,003	0,003	0,003	0,005	0,005	0,008	0,008	
Minimum back pressure [bar] for drop tight service	PVC-U	0,3	0,3	0,3	0,2	0,2	0,2	0,2	0,2	0,2	0,2	
Kv100 [l/min]		370	900	1250	1867	2867	5700	8167	18800	25000	31900	

Notes: n.a.= not available, o.r.= on request (not in standard production)

Wafer Check Valve

Body material

PVC-U

Seals material

EPDM

NOTE: Other materials and types of Wafer Check Valves can be supplied on request: please ask for type FR.

SV

d [mm]		20	25	32	
DN [mm]		15	20	25	
Size [inches]		1/2"	3/4"	1"	Type
ISO-DIN metric series unionised plain female ends	PVC-U	●	●	●	SVUIV
BSP series unionised threaded female ends	PVC-U	●	●	●	SVUFV
BS unionised socket welding	PVC-U	o.r.	o.r.	o.r.	SVULV
ASTM series unionised plain female ends	PVC-U	o.r.	o.r.	o.r.	SVUAV
NPT series unionised threaded female ends	PVC-U	o.r.	o.r.	o.r.	SVUNV
PN [bar] 16 bar = 232 psi	PVC-U	16	16	16	
Regulation Range [bar]	0.3 ÷ 4				

Notes: n.a.= not available, o.r.= on request (not in standard production)

Angle Seat Pressure Relief Valve

Body material

PVC-U

Seals materials

EPDM

FPM

SV

VKD/CP



Pneumatically actuated 2-Way Ball Valve

Body materials

PVC-U
PP-H
PVDF
PVC-C

Ball seats material

PTFE

Seals materials

EPDM
FPM

Working functions

DA *Double acting*
NC *Normally Closed*
NO *Normally Open*

d [mm]		16	20	25	32	40	50	63	75	90	110
DN [mm]		10	15	20	25	32	40	50	65	80	100
SIZE [inch]		3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"

for materials and sizes available see manual valve VKD

Kv100 [l/min]		80	200	385	770	1100	1750	3400	5250	7100	9500
PN [bar] 16 bar = 232 psi 10 bar = 150 psi	PVC-U	16	16	16	16	16	16	16	10*	10*	10*
	PP-H	10	10	10	10	10	10	10	10	10	10
	PVDF	16	16	16	16	16	16	16	10*	10*	10*
	PVC-C	16	16	16	16	16	16	16	10*	10*	10*
Control pressure [bar]		standard 6									
NAMUR Air Connections	BSP	1/8"	1/8"	1/8"	1/8"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"
Actuator capacity [NL]	DA	0,18	0,18	0,23	0,23	0,45	0,45	0,45	0,45	0,61	0,98
	NC-NO	0,18	0,18	0,23	0,23	0,45	0,45	0,45	0,61	0,98	1,8

* on request PN16

Accessories

Position Indicator

Pilot solenoid valve 3-5/2 ways

Voltages AC	230-110-24 V
Voltages DC	24 V
Protection	IP 65

Limit Switches box

Electromechanical	Contact rate	2,5A (24V)-0,3A (250V)
	Protection	IP 67
Proximity PNP (3 wires)	Voltage	5-36 V DC
	Current	0-200 mA
	Protection	IP67
Proximity NAMUR	Voltage	8 V DC
	Protection	IP 67
	Safety Class	EEx ia IIC T6

Pneumatic or Electropneumatic Positioner

Input signal	3-15 psi or 4-20 mA
Protection	IP 65

TKD/CP



Pneumatically actuated 3-Way Ball Valve

Body materials

PVC-U
PP-H
PVC-C

Ball seats material

PTFE

Seals materials

EPDM
FPM

Working functions

DA *Double acting*
NC *Normally Closed*
NO *Normally Open*

supplied standard with L-bore
on request with T-bore
(Configuration 1,2,3,4: see catalogue)

TKD/CP

d [mm]		16	20	25	32	40	50	63
DN [mm]		10	15	20	25	32	40	50
SIZE [inch]		3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"

for materials and sizes available see manual valve TKD

Kv100 [l/min] with L bore		48	73	150	265	475	620	1220
PN [bar] 16 bar = 232 psi 10 bar = 150 psi	PVC-U	16	16	16	16	16	16	16
	PP-H	10	10	10	10	10	10	10
	PVDF	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.
	PVC-C	16	16	16	16	16	16	16
Control pressure [bar]		standard 6						
NAMUR Air Connections	BSP	1/8"	1/8"	1/4"	1/4"	1/4"	1/4"	1/4"
Actuator capacity [NL]	DA	0,23	0,23	0,45	0,45	0,45	0,45	0,61
	NC-NO	0,23	0,23	0,45	0,45	0,45	0,45	0,61

Note: o.r. = on request (not in standard production).

Accessories

Position Indicator

Pilot solenoid valve 3-5/2 ways	Voltages AC	230-110-24 V	
	Voltages DC	24 V	
	Protection	IP 65	

Limit Switches box

Electromechanical	Contact rate	2,5A (24V)-0,3A (250V)		
	Protection	IP 67		
	Proximity PNP (3 wires)	Voltage	5-36 V DC	
		Current	0-200 mA	
		Protection	IP67	
	Proximity NAMUR	Voltage	8 V DC	
Protection		IP 67		
Safety Class		EEx ia IIC T6		

Pneumatic or Electropneumatic Positioner

Pneumatic or Electropneumatic Positioner	Input signal	3-15 psi or 4-20 mA	
	Protection	IP 65	

FK/CP



Pneumatically actuated Butterfly Valve

Body material

PP-GR

Disc materialS

PVC-U
PP-H
PVDF
PVC-C
ABS

Stem material

Stainless steel 420
(S.S 316 on req.)

Seals materials

EPDM
FPM
(NBR on req.)

Working functions

DA *Double acting*
NC *Normally Closed*
NO *Normally Open*

d [mm]		50	63	75	90	110	140	160	225	280	315
DN [mm]		40	50	65	80	100	125	150	200	250	300
SIZE [inch]		1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"
for materials and sizes available see manual valve FK											
Kv100 [l/min]		1000	1285	1700	3550	5900	9850	18700	30500	53200	81600
PN [bar] 16 bar = 232 psi 10 bar = 150 psi 8 bar = 116 psi	PVC-U	16	16	10	10	10	10	10	10	10	8
	PP-H	10	10	10	10	10	10	10	10	10	8
	PVDF	16	16	10	10	10	10	10	10	10	8
	PVC-C	16	16	10	10	10	10	10	10	10	8
	ABS	16	16	10	10	10	10	10	10	10	8
PN [bar] Lug version	all mater.	n.a.	n.a.	10	10	10	10	10	10	n.a.	n.a.
Control pressure [bar]		standard 6									
NAMUR Air Connections	BSP	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"
Actuator capacity [NL]	DA	0,45	0,45	0,45	0,61	0,98	0,98	1,8	2,8	4,9	4,9
	NC-NO	0,45	0,61	0,61	0,98	1,8	2,8	2,8	8	14,2	14,2

Notes: n.a.= not available, o.r.= on request (not in standard production)

Accessories

Position Indicator

Pilot solenoid valve 3-5/2 ways

Voltages AC	230-110-24 V
Voltages DC	24 V
Protection	IP 65

Limit Switches box

Electromechanical	Contact rate	2,5A (24V)-0,3A (250V)
	Protection	IP 67
	Voltage	5-36 V DC
Proximity PNP (3 wires)	Current	0-200 mA
	Protection	IP67
	Voltage	8 V DC
Proximity NAMUR	Protection	IP 67
	Safety Class	EEx ia IIC T6

Pneumatic or Electropneumatic Positioner

Input signal	3-15 psi or 4-20 mA
Protection	IP 65

SPECIAL VERSIONS FOR SWIMMING POOL APPLICATION AVAILABLE ON REQUEST

FE/CP



Pneumatically actuated Butterfly Valve

Body material

PVC-U

Disc material

PVC-U

Stem material

Zinc plated steel

Seals materials

EPDM
FPM
(NBR on req.)

Working functions

DA *Double acting*
NC *Normally Closed*
NO *Normally Open*

d [mm]		50	63	75	90	110	140	160	225
DN [mm]		40	50	65	80	100	125	150	200
SIZE [inch]		1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"

for materials and sizes available see manual valve FE

Kv100 [l/min]		1000	1285	1700	3550	5900	9850	18700	30500
PN [bar] 16 bar = 232 psi 10 bar = 150 psi	PVC-U	16	16	10	10	10	10	10	10
PN [bar] Lug version	all mater.	6	6	6	6	6	4	4	4
Control pressure [bar]		standard 6							
NAMUR Air Connections	BSP	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"
Actuator capacity [NL]	DA	0,45	0,45	0,45	0,61	0,98	0,98	1,8	2,8
	NC-NO	0,45	0,61	0,61	0,98	1,8	2,8	2,8	8

Accessories

Position Indicator

Pilot solenoid valve 3-5/2 ways	Voltages AC	230-110-24 V
	Voltages DC	24 V
	Protection	IP 65

Limit Switches box

	Electromechanical	Contact rate	2,5A (24V)-0,3A (250V)
		Protection	IP 67
	Proximity PNP (3 wires)	Voltage	5-36 V DC
		Current	0-200 mA
		Protection	IP67
	Proximity NAMUR	Voltage	8 V DC
Protection		IP 67	
Safety Class		EEx ia IIC T6	

Pneumatic or Electropneumatic Positioner

Input signal	3-15 psi or 4-20 mA
Protection	IP 65

SPECIAL VERSIONS FOR SWIMMING POOL APPLICATION AVAILABLE ON REQUEST

MK/CP



Pneumatically actuated Diaphragm Valve

Piston type actuator

Body materials

PVC-U
PP-H
PVDF
PVC-C

Diaphragm materials

EPDM
FPM
PTFE
(NBR on req.)

O-Ring materials

EPDM
FPM

Working functions

DA *Double acting*
NC *Normally Closed*
NO *Normally Open*

d [mm]		20	25	32	40	50	63
DN [mm]		15	20	25	32	40	50
SIZE [inch]		1/2"	3/4"	1"	1 1/4"	1 1/2"	2"

for materials and sizes available see manual valve VM

Kv100 [l/min]		93	136	175	300	416	766
PN [bar] 10 bar = 150 psi 6 bar = 87 psi	all mater.	10	10	10	10	10	10
Control pressure [bar]	NC	max 6 (see graph)					
	NO-DA	max 5 (see graph)					
Air Connections	BSP	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"
Actuator capacity [NL]	NC	0,19	0,19	0,19	0,31	0,31	0,68
	NO-DA	0,17	0,17	0,17	0,33	0,33	0,79

Accessories

Position Indicator

Stroke limiter

Stroke limiter with optical position indicator

Stroke limiter with optical position indicator and emergency manual override

Pilot solenoid valve 3/2 ways <i>(Direct or gang mounting)</i>	Voltages AC	230-110-48-24 V
	Voltages DC	110-24-12 V
	Protection	IP 65

Limit Switches box


Electromechanical	Contact rate	250 V-5 A
	Protection	IP 65
Proximity PNP (3 wires)	Voltage	10-30 V DC
	Current	0-100 mA
	Protection	box: IP65
Proximity NAMUR (2 wires)	Voltage	8 V DC
	Protection	box: IP 65

Electropneumatic Positioner


Input signal	4-20 mA
Protection	IP 65

OTHER SPECIAL: SEE OFFICIAL CATALOGUE

MK/NC



MK/NO-DA



VM/NC



Pneumatically actuated Diaphragm Valve Normally Closed

Diaphragm type actuator

Body materials

PVC-U
PP-H
PVDF
PVC-C

Diaphragm materials

EPDM
FPM
PTFE
NBR

O-Ring materials

EPDM
FPM

d [mm]		20	25	32	40	50	63	75	90	110
DN [mm]		15	20	25	32	40	50	65	80	100
SIZE [inch]		1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
for materials and sizes available see manual valve VM										
Kv100 [l/min]		93	136	175	300	416	766	1300	2000	2700
PN [bar] 10 bar = 150 psi 6 bar = 87 psi	all mater.	10	10	10	10	10	10	6	6	6
Control pressure [bar]	max 6 (see graph)									
Air Connections	BSP	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"
Actuator capacity [NL]		0,16	0,16	0,16	0,36	0,36	1,15	2,10	2,10	

Accessories

Position Indicator

Stroke limiter

Stroke limiter with optical position indicator

Stroke limiter with optical position indicator and emergency manual override

Pilot solenoid valve

3/2 ways

(Direct or gang mounting)


Voltagess AC	230-110-48-24 V
Voltagess DC	110-24-12 V
Protection	IP 65

Limit Switches box

Electromechanical	Contact rate	250 V-5 A
	Protection	IP 65
Proximity PNP (3 wires)	Voltage	10-30 V DC
	Current	0-100 mA
	Protection	box: IP65
Proximity NAMUR (2 wires)	Voltage	8 V DC
	Protection	box: IP 65

Electropneumatic Positioner

Input signal	4-20 mA
Protection	IP 65



OTHER SPECIAL: SEE OFFICIAL CATALOGUE

VM/NO



Pneumatically actuated Diaphragm Valve Normally Open Diaphragm type actuator

Body materials

PVC-U
PP-H
PVDF
PVC-C

Diaphragm materials

EPDM
FPM
PTFE
NBR

O-Ring materials

EPDM
FPM

Functions

Up to DN50 the NO is also suitable for DA
For DN65-80-100 DA version on request

d [mm]		20	25	32	40	50	63	75	90	110
DN [mm]		15	20	25	32	40	50	65	80	100
SIZE [inch]		1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"

for materials and sizes available see manual valve VM

Kv100 [l/min]		93	136	175	300	416	766	1300	2000	2700
PN [bar] 10 bar = 150 psi 6 bar = 87 psi	all mater.	10	10	10	10	10	10	6	6	6
Control pressure [bar]		max 6 (see graph)								
Air Connections	BSP	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"
Actuator capacity [NL]		0,13	0,13	0,13	0,28	0,28	0,50	2,20	2,20	

Accessories

Position Indicator

Stroke limiter

Stroke limiter with optical position indicator

Stroke limiter with optical position indicator and emergency manual override

Pilot solenoid valve

3/2 ways

(Direct or gang mounting)

Voltagcs AC	230-110-48-24 V
Voltagcs DC	110-24-12 V
Protection	IP 65

Limit Switches box


Electromechanical	Contact rate	250 V-5 A
	Protection	IP 65
Proximity PNP (3 wires)	Voltage	10-30 V DC
	Current	0-100 mA
	Protection	box: IP65
Proximity NAMUR (2 wires)	Voltage	8 V DC
	Protection	box: IP 65

Electropneumatic

Positioner

Input signal	4-20 mA
Protection	IP 65

OTHER SPECIAL: SEE OFFICIAL CATALOGUE



DM/NO



d [mm]		20	25	32	40	50	63
DN [mm]		15	20	25	32	40	50
SIZE [inch]		1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Kv100 [l/min]		93	136	175	300	416	766
PN [bar]	PVC-U	2-8	2-8	2-8	2-8	2-8	2-8
8 bar = 116 psi							
Control pressure [bar]	max 10 (see graph)						
Air Connections	BSP	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"

Pneumatically actuated Diaphragm Valve Normally Open Direct acting actuator

Body materials

PVC-U
PP-H

Diaphragm materials


EPDM
FPM

O-Ring materials

EPDM
FPM

Accessories

Pilot solenoid valve 3/2 ways (Direct or gang mounting)	Voltages AC	230-110-48-24 V
	Voltages DC	110-24-12 V
	Protection	IP 65



CM/CP



**Compact
Pneumatically
actuated Diaphragm
Valve**
Piston type actuator

Body materials

PVC-U
PP-H
PVDF
PVC-C

Diaphragm materials

EPDM
FPM
PTFE
NBR

O-Ring materials

EPDM
FPM

Working functions

DA *Double acting*
NC *Normally Closed*
NO *Normally Open*

d [mm]		16	20
DN [mm]		12	15
SIZE [inch]		3/8"	1/2"

for materials and sizes available see manual valve CM

Kv100 [l/min]		47	58
PN [bar]	all mater.	6	6
6 bar = 87 psi			
Control pressure [bar]		4 - 7 (see graph)	
Air Connections	BSP	1/8"	1/8"
Actuator capacity [NL]		0,027	0,027

Accessories

Position Indicator

Stroke limiter

Stroke limiter with optical position indicator


Pilot solenoid valve

3/2 ways
(Direct or gang mounting)

Voltages AC	230-110-48-24 V
Voltages DC	110-24-12 V
Protection	IP 65

Limit Switches box

Electromechanical	Contact rate	250 V-5 A
	Protection	IP 65
Proximity NAMUR (2 wires)	Voltage	8 V DC
	Protection	box: IP 65





Electrically actuated 2-Way Ball Valve

Body materials

PVC-U
PP-H
PVDF
PVC-C

Ball seats material

PTFE

Seals material

EPDM
FPM

d [mm]		16	20	25	32	40	50	63	75	90	110
DN [mm]		10	15	20	25	32	40	50	65	80	100
SIZE [inch]		3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"

for materials and sizes available see manual valve VKD

PN [bar] 16 bar = 232 psi 10 bar = 150 psi	PVC-U	16	16	16	16	16	16	10*	16	16	16
	PP-H	10	10	10	10	10	10	10	10	10	10
	PVDF	16	16	16	16	16	16	10*	16	16	16
	PVC-C	16	16	16	16	16	16	10*	16	16	16
Kv100 [l/min]		80	200	385	770	1100	1750	3400	5250	7100	9500

* on request PN16

Actuator data	DN 10-63			DN 65-80			DN 100		
	DC	AC/DC	AC	DC	AC/DC	AC	DC	AC/DC	AC
Voltage [V]	12	24	90÷240	12	24	90÷240	12	24	90÷240
Power [W]	15	15	15	45	45	45	45	45	45
Max Working time [s]	11	12	13	12	13	15	22	22	25
Duty rating CEI34	50%	30%	30%	50%	30%	30%	50%	30%	30%
Protection	IP66	IP65	IP65	IP66	IP65	IP65	IP66	IP65	IP65

Temperature	-10°C/+55°C	
Electrical connections	Power supply	DIN 43650 3P+T
	Limit switches	gland ISO M20
Special versions on request	Different working times	
	IP66 or IP67	
	Duty 50%	
Actuator standard equipment	ATEX II 2 GD EEx d IIB T6	
	Emergency manual override	
	Visual position indicator	
	2 auxiliary and adjustable limit switches	
Actuator accessories	Torque limiter	
	Heating resistor (for IP66-IP67)	
	Positioner 4-20 mA or 0-10 V	
	Fail safe security device (NC or NO)	
	Heating resistor (for IP65)	
	Feed back potentiometer 0.1 - 1 - 5 - 10 Kohm	
	4-20 mA position transmitter	
	2 additional limit switches	

TKD/CE



Electrically actuated 3-Way Ball Valve

Body materials

PVC-U
PP-H
PVC-C

Ball seats material

PTFE

Seals materials

EPDM
FPM

Functions

L-bore (standard)
T-bore (on request)

d [mm]		16	20	25	32	40	50	63
DN [mm]		10	15	20	25	32	40	50
SIZE [inch]		3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"

for materials and sizes available see manual valve TKD

PN [bar] 16 bar = 232 psi 10 bar = 150 psi	PVC-U	16	16	16	16	16	16	10
	PP-H	10	10	10	10	10	10	10
	PVDF	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.	o.r.
	PVC-C	16	16	16	16	16	16	10
Kv100 [l/min] with L bore		48	73	150	265	475	620	1220

Note: o.r. = on request (not in standard production).

Actuator data	DN 10-63		
	DC	AC/DC	AC
Voltage [V]	12	24	90÷240
Power [W]	15	15	15
Max Working time [s]	11	12	13
Duty rating CEI34	50%	30%	30%
Protection	IP66	IP65	IP65

Temperature	-10°C/+55°C	
Electrical connections	Power supply	DIN 43650 3P+T
	Limit switches	gland ISO M20
Special versions on request	Different working times	
	IP66 or IP67	
	Duty 50%	
	ATEX II 2 GD EEx d IIB T6	
Actuator standard equipment	Emergency manual override	
	Visual position indicator	
	2 auxiliary and adjustable limit switches	
	Torque limiter	
Actuator accessories	Heating resistor (for IP66-IP67)	
	Positioner 4-20 mA or 0-10 V	
	Fail safe security device (NC or NO)	
	Heating resistor (for IP65)	
	Feed back potentiometer 0.1 - 1 - 5 - 10 Kohm	
	4-20 mA position transmitter	
	2 additional limit switches	
3rd position 180°		

FK/CE



Electrically actuated Butterfly Valve

Body material

PP-GR

Disc materials

PVC-U
PP-H
PVDF
PVC-C
ABS

Stem material

Stainless steel 420
(S.S 316 on req.)

Seals materials

EPDM
FPM
(NBR on req.)

d [mm]	50	63	75	90	110	140	160	225	280	315	
DN [mm]	40	50	65	80	100	125	150	200	250	300	
SIZE [inch]	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"	

for materials and sizes available see manual valve FK

PN [bar] 16 bar = 232 psi 10 bar = 150 psi 8 bar = 116 psi	PVC-U	16	16	10	10	10	10	10	10	10	8	
	PP-H	10	10	10	10	10	10	10	10	10	8	
	PVDF	16	16	10	10	10	10	10	10	10	8	
	PVC-C	16	16	10	10	10	10	10	10	10	8	
	ABS	16	16	10	10	10	10	10	10	10	8	
PN [bar] Lug version	all mater.	10	10	10	10	10	10	10	10	n.a.	n.a.	
Kv100 [l/min]		1000	1285	1700	3550	5900	9850	18700	30500	53200	81600	
Actuator data	DN 40-50-65			DN 80-100			DN 125-150		DN 200		DN 250-300	
	DC	AC/DC	AC	DC	AC/CD	AC	AC/DC	AC	AC/DC	AC	AC/DC	AC
Voltage [V]	12	24	90÷240	12	24	90÷240	24	90÷240	24	90÷240	24*	230
Power [W]	15	15	15	45	45	45	85	85	85	85	-	250
Max Working time [s]	12	12	13	12	13	15	30	30	50	50	-	38
Duty rating CEI34	50%	30%	30%	50%	30%	30%	50%	50%	50%	50%	-	50%
Protection	IP66	IP65	IP65	IP66	IP65	IP65	IP67	IP67	IP67	IP67	IP67	IP67

* on request

Temperature	-10°C/+55°C		
Electrical connections	(DN40-100)	Power supply	DIN 43650 3P+T
		Limit switches	gland ISO M20
	(DN125-300)	Power supply	gland ISO M20
		Limit switches	gland ISO M20
Special versions on request	Different working times		
	IP66 or IP67		
	Duty 50%		
	ATEX II 2 GD EEx d IIB T6		
Actuator standard equipment	Emergency manual override		
	Visual position indicator		
	2 auxiliary and adjustable limit switches		
	Torque limiter		
Actuator accessories	Heating resistor for (IP66-IP67)		
	Positioner 4-20 mA or 0-10 V		
	Fail safe security device (NC or NO)		
	Heating resistor (for IP65)		
	Feed back potentiometer 0.1 - 1 - 5 - 10 Kohm		
	4-20 mA position transmitter		
	2 additional limit switches		

FK/CE

FE/CE



d [mm]	50	63	75	90	110	140	160	225
DN [mm]	40	50	65	80	100	125	150	200
SIZE [inch]	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"

for materials and sizes available see manual valve FE

PN [bar]	PVC-U	16	16	10	10	10	10	10
16 bar = 232 psi								
10 bar = 150 psi								
PN [bar] Lug version		6	6	6	6	4	4	4
Kv100 [l/min]		1000	1285	1700	3550	5900	9850	30500

Actuator data	DN 40-50-65			DN 80-100			DN 125-150		DN 200	
	DC	AC/DC	AC	DC	AC/CD	AC	AC/DC	AC	AC/DC	AC
Voltage [V]	12	24	90÷240	12	24	90÷240	24	90÷240	24	90÷240
Power [W]	15	15	15	45	45	45	85	85	85	85
Max Working time [s]	12	12	13	12	13	15	30	30	50	50
Duty rating CEI34	50%	30%	30%	50%	30%	30%	50%	50%	50%	50%
Protection	IP66	IP65	IP65	IP66	IP65	IP65	IP67	IP67	IP67	IP67

Temperature	-10°C/+55°C		
Electrical connections	(DN40-100)	Power supply	DIN 43650 3P+T
		Limit switches	gland ISO M20
	(DN125-300)	Power supply	gland ISO M20
		Limit switches	gland ISO M20
Special versions on request	Different working times		
	IP66 or IP67		
	Duty 50%		
	ATEX II 2 GD EEx d IIB T6		
Actuator standard equipment	Emergency manual override		
	Visual position indicator		
	2 auxiliary and adjustable limit switches		
	Torque limiter		
	Heating resistor for (IP66-IP67)		
	Positioner 4-20 mA or 0-10 V		
Actuator accessories	Fail safe security device (NC or NO)		
	Heating resistor (for IP65)		
	Feed back potentiometer 0.1 - 1 - 5 - 10 Kohm		
	4-20 mA position transmitter		
	2 additional limit switches		

Electrically actuated Butterfly Valve

Body material	PVC-U
Disc material	PVC-U
Stem material	Zinc plated steel
Seals materials	EPDM FPM (NBR on req.)

S12/S22



2-Way Solenoid Valve

Body material

PVC-U
PVC-C on request (not in standard production)

Seals materials

EPDM
FPM

		S12				S22			
d [mm]		10-16	12-16	12-16		16-20	16-20	20	
DN [mm]		4	6	8		8	10	15	
R [inch]		3/8"	3/8"	3/8"	Type	3/8"-1/2"	3/8"-1/2"	1/2"	Type
ISO-DIN metric series plain female ends	PVC-U	●	●	●	S12IV	●	●	●	S22IV
BSP series threaded female ends	PVC-U	●	●	●	S12FV	●	●	●	S22FV
BS socket welding	PVC-U	●	●	●	S12LV	●	●	●	S22LV
ASTM series plain female ends	PVC-U	●	●	●	S12AV	●	●	●	S22AV
NPT series threaded female ends	PVC-U	●	●	●	S12NV	●	●	●	S22NV
PN [bar] 6 bar = 87 psi 4 bar = 58 psi 2 bar = 29 psi	PVC-U	6	4	2		6	4	2	
Kv100 [l/min]		6,7	12,1	15,3		27,5	34,2	58,3	
Voltages	a.c. (*)	230 - 110 - 24	50/60 Hz	other voltages					
	d.c.	24	other voltages						
Power consumption		10 W				20 W			
Duty		100% ED							
Protection		IP65							

(*) the coils are RAC (rectifier alternate current): use the plug supplied with the valve, that includes the rectifier.

Note: o.r.= on request (not in standard production).

STANDARD REFERENCES (dimensions)

	Solvent Welding		Socket Fusion		Threaded couplings	Flanged couplings	Butterfly Valves overall dimensions
		Relevant Pipe Standard		Relevant Pipe Standard			
PVC-U	ISO 727	ISO 161/1			UNI ISO 228/1	DIN 2501	(all materials) DIN 2501 ISO DIS 9624 UNI 2223 BS 10 table D/E ASA B16.5 class 150 JIS 2212 K10 (except for DN 200/DN300) JIS 2212 K5 (except for DN 50)
	UNI EN 1452	UNI EN 1452			DIN 2999	ISO 2084	
	DIN 8063	DIN 8062			BS 21	UNI 7442/75	
	NF T54-028	NF T54-016			ASTM 2464/76	DIN 8063	
	BS 4346/1	BS 3506, BS 3505			ANSI B1.20.1	ASA ANSI B.16.5 150	
	ASTM 2467/6a	ASTM D 1785/76					
PP-H			DIN 16962	DIN 8077	UNI ISO 228/1	ISO 2084	
				EN ISO 15494	DIN 2999	UNI EN 1452	
				UNI 8318	BS 21	DIN 8063	
						ASA ANSI B.16.5 150	
PVDF			ISO 10931	ISO 10931/2		DIN 2501	
						ISO 2084	
						UNI 7442/75	
						DIN 8063	
						ASA ANSI B.16.5 150	
PVC-C	ISO 727	EN ISO 15493			ASTM 2464/76	ISO 2084	
	EN ISO 15493	DIN 8079/8080			ANSI B1.20.1	UNI 7442/75	
	ASTM F439	ASTM D 1785/76				DIN 8063	
						ASA ANSI B.16.5 150	



FORMATURA
INIEZIONE
POLIMERI

Since 1954 FIP produces injection moulded valves and fittings in thermoplastic materials for pressure pipeline systems thus becoming nowadays the largest European valves manufacturer.

FIP is a company of the Aliaxis Group: a worldwide industrial holding gathering together a series of companies manufacturing and marketing plastic plumbing

products for building industrial and public utilities applications.

FIP products are manufactured on EU production sites, operating to the Quality Assurance System in compliance with ISO 9001 and with the Environmental Management System ISO 14001 standards requirements.

In FIP products there are over 50 years of know-how powered by a strong quest for innovation.

FIP
Formatura
Iniezione
Polimeri

Loc. Pian di Parata
16015 Casella Genova Italy
tel. +39 010 9621.1
fax +39 010 9621.209
info@fipnet.it
www.fipnet.it

an *Aliaxis* company

B 54-

B_s

LEVALBOOK 01/2013